



wordbench

Json Output Format Guide

October 2023

Contents

1. OFFICIAL DISCLAIMER.....	3
Trademarks	3
2. OVERVIEW.....	4
Intended Audience	4
About the JSON file format	4
Additional Resources.....	4
3. JSON OUTPUT SCHEMA	5
Top-level Elements	5
The "utterances" Array	7
The "app_data" Object	10
The "scorecard" Object	13
The "client_data" Object.....	13

1. OFFICIAL DISCLAIMER

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPRIETARY AND CONFIDENTIAL INFORMATION OF VOICE AI PTY LTD (CALL JOURNEY CI). YOU MAY NOT DISCLOSE, PROVIDE OR MAKE AVAILABLE THIS DOCUMENT, OR ANY INFORMATION CONTAINED IN THIS DOCUMENT, TO ANY THIRD PARTY, WITHOUT THE PRIOR WRITTEN CONSENT OF CALL JOURNEY CI.

The Information in this document is provided for use with Call Journey CI products. No license, express or implied, to any intellectual property associated with this document or such products is granted by this document.

All Call Journey CI products described in this document are owned and/or licensed by Call Journey CI and are protected by patents, trade secrets, copyrights or other intellectual/industrial property rights.

The Call Journey CI products described in this document may still be in development. The final form of each product and release date thereof is at the sole and absolute discretion of Call Journey CI. Your purchase, license and/or use of Call Journey CI products shall be subject to Call Journey CI then current terms and conditions.

Trademarks

The following are trademarks of Call Journey CI in Australia and other countries:

- Call Journey
- Voice AI
- WordBench
- Record Retrieve

2. OVERVIEW

Intended Audience

This manual is written for developers looking to parse the output JSON from the WordBench product.

About the JSON file format

Call Journey CI's speech-to-text engines handle speech to text conversion and provide additional metadata of each processed audio file including emotional intelligence, confidence scores, word start and end times, and other call information. Call Journey CI products use the JSON file format to store the text information in an organized fashion to provide the most content that can be derived from the audio source. Products such as WordBench may have additional JSON elements that are not included in the base JSON structure.

JSON stands for JavaScript Object Notation, which is a syntax for storing and exchanging data. It provides a human-readable collection of data that can be accessed in a concise and logical manner. JSON filename extension is **.json**.

Additional Resources

The examples contained in this document are screenshots of the JSON Viewer software, which can be downloaded for free at the following link: <https://jsonviewer.codeplex.com/>

3. JSON OUTPUT SCHEMA

Before defining each JSON element, it should be noted that when a data value is not defined (null), the data name will not appear as an element in JSON output, so keep in mind that, when viewing a specific JSON output file, not all the elements listed below may be included.


Top-level Elements

The top-level elements included in a Call Journey CI JSON are described below.

Element	Type	Definition
*app_data	object	JSON object that stores metadata generated by WordBench
*client_data	object	JSON object that stores call metadata associated with the audio file
confidence	value	A measure of how confident the speech recognition system is in its transcription results <ul style="list-style-type: none"> • Range between 0 and 1 • 1 is most confident
donedate	value	Date and time the file transcription was completed by the speech-to-text engine
model	array	Language model(s) used to process this audio file
nchannels	value	Number of channels in the audio file unless diarization is set to true, in which a single (1) channel file is broken up into 2 based on speaker separation
recvdate	value	Date and time the audio file was received by the speech-to-text engine
*scrubbed	value	If true then audio is purified so numbers are all redacted. If false, the data name does not appear in the JSON output.
*sentiment	value	Linguistic sentiment value: <ul style="list-style-type: none"> • Positive • Mostly Positive • Neutral • Mostly Negative • Negative • Mixed (contains both Positive and Negative in the file)
*sentiment_scores	array	Array of length 2. [0]=Positive phrase counts and [1]=Negative phrase counts in the file
source	value	Audio file name
utterances	array	Contains the word transcripts and corresponding metadata organized by utterances (speech segments broken up by silence boundaries)

*Indicates JSON elements that are only available with WordBench.

An example of the top-level information is shown below.

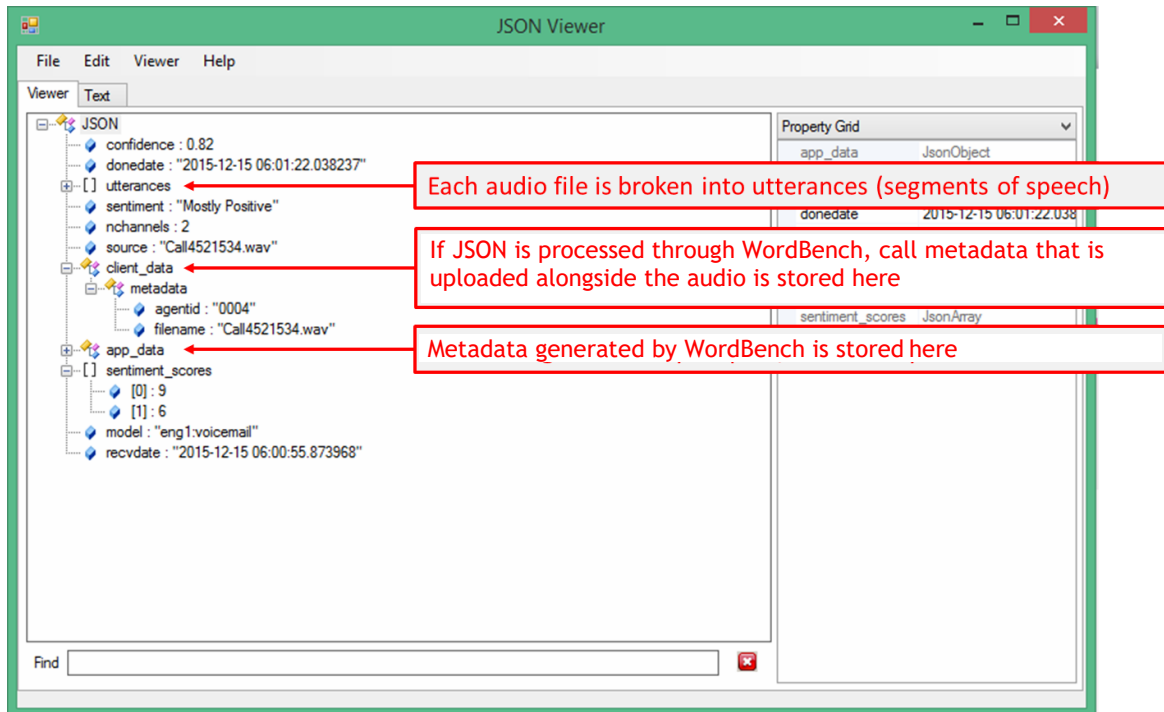

The "utterances" Array

The top-level **utterances** element contains an array of speech segment information. Each array element consists of the following elements:


Object	Type	Definition
metadata	object	Speaker information of the utterance. Each object contains the following values: <ul style="list-style-type: none"> • channel: channel number • model: model that decoded the utterance • source: audio file name • uttid: utterance segment number
confidence	value	A measure of how confident the speech recognition system is in its utterance transcription results <ul style="list-style-type: none"> • Range between 0 and 1 • 1 is most confident
done date	value	Date and time the utterance transcription was completed by the speech- to-text engine
*emotion	value	Emotional intelligence consists of both acoustic and linguistic information. Events can be given the following values: <ul style="list-style-type: none"> • Positive • Mostly Positive • Neutral • Mostly Negative • Negative
end	value	End time of the utterance in seconds
events	array	Contains information about individual words. Each element is a word object that contains the following values: <ul style="list-style-type: none"> • confidence: word level transcription confidence value between 0 and 1 • end: end time of the word in seconds • start: start time in seconds • word: normalized word • wordex: raw dictionary word
*gender	value	Gender prediction of the speaker
recvd date	value	Date and time the utterance was received by the speech-to-text engine
*sentiment	value	Utterance-level linguistic sentiment value: <ul style="list-style-type: none"> • Positive • Mostly Positive • Neutral • Mostly Negative • Negative • Mixed (contains both Positive and Negative in the file)

Object	Type	Definition
sentimentex	array	Contains sentiment information for each utterance <ul style="list-style-type: none"> • [0][0]=Positive phrase counts • [0][1]=Negative phrase counts in utterance • [1][] consist of an array of sentiment segments where [0] = '+' or '-' for Positive and Negative, and [1] is the position range of the phrase
start	value	Start time of the utterance in seconds

*Indicates JSON elements that are only available with WordBench.

Each **utterances** element contains an **events** array, which provides information about each word in the utterance.

Examples of an utterances array element and an events array are shown below:

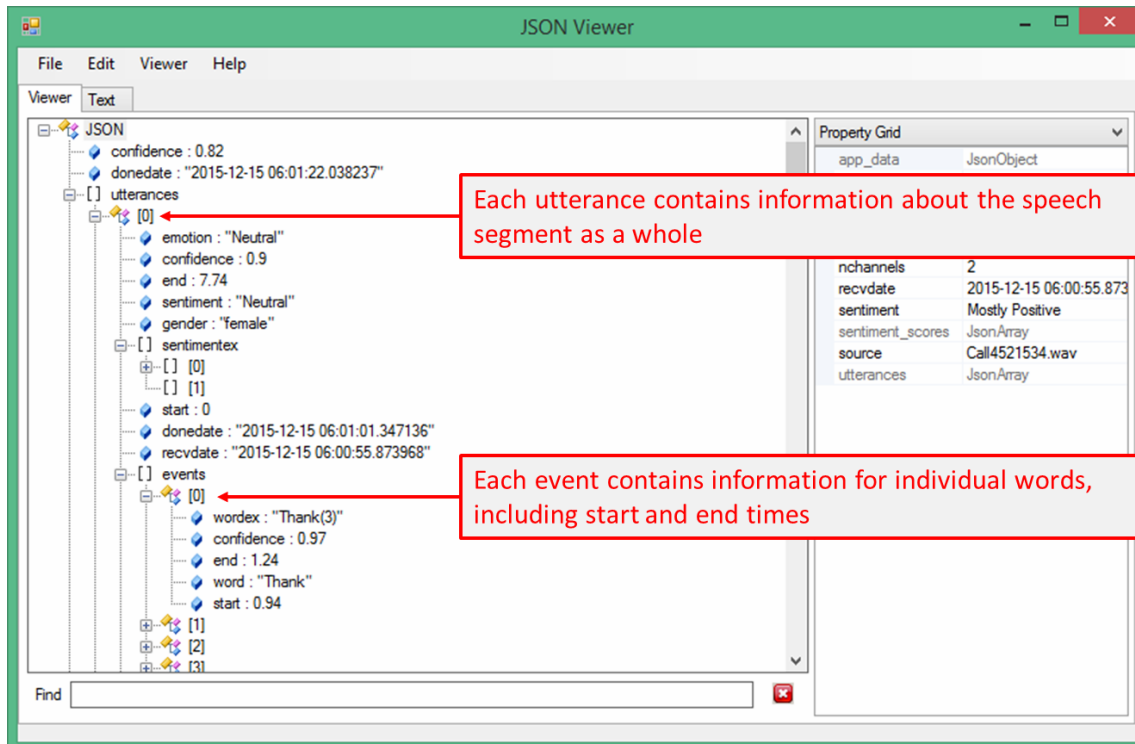



The "app_data" Object

Another top-level JSON object is **app_data**. This object is **only** available when extracting JSON from WordBench. Metadata in this object applies to the whole call, rather than to individual utterances.

Data Value	Definition
agent_channel	The channel the agent is on
agent_clarity	How clear the agent channel/speech is <ul style="list-style-type: none"> • Range between 0 and 1 • 1 is clearest.
agent_emotion	Overall agent emotional intelligence consists of both acoustic and linguistic information and can have the following values: <ul style="list-style-type: none"> • Positive • Improving • Negative • Worsening
agent_gender	Agent gender prediction
client_clarity	How clear the client channel/speech is <ul style="list-style-type: none"> • Range between 0 and 1 • 1 is clearest
client_emotion	Overall client emotional intelligence consists of both acoustic and linguistic information and can have the following values: <ul style="list-style-type: none"> • Positive • Improving • Negative • Worsening
client_gender	Client gender prediction
diarization	This value provided in 2 speaker, 1 channel calls. <ul style="list-style-type: none"> • Range between 0 and 1. • 1 is best speaker separation.
duration	Call duration
overall_emotion	Overall file emotional intelligence consists of both acoustic and linguistic information and can have the following values: <ul style="list-style-type: none"> • Positive • Improving • Negative • Worsening
overtalk	Percentage of call when the agent talks over or interrupts the client. Equal to the number of turns where the agent initiated overtalk divided by the total number of agent turns.
scorecard	Contains any application scores that have been calculated for the transcript
silence	Percentage of overall duration that is silence. Equal to all non-speech time, calculated as call duration minus the sum of the duration of each word. If music and noise is not decoded to word-events, they would be counted as silence.
url	Location in WordBench where the files can be viewed

An example of **app_data** is shown below.

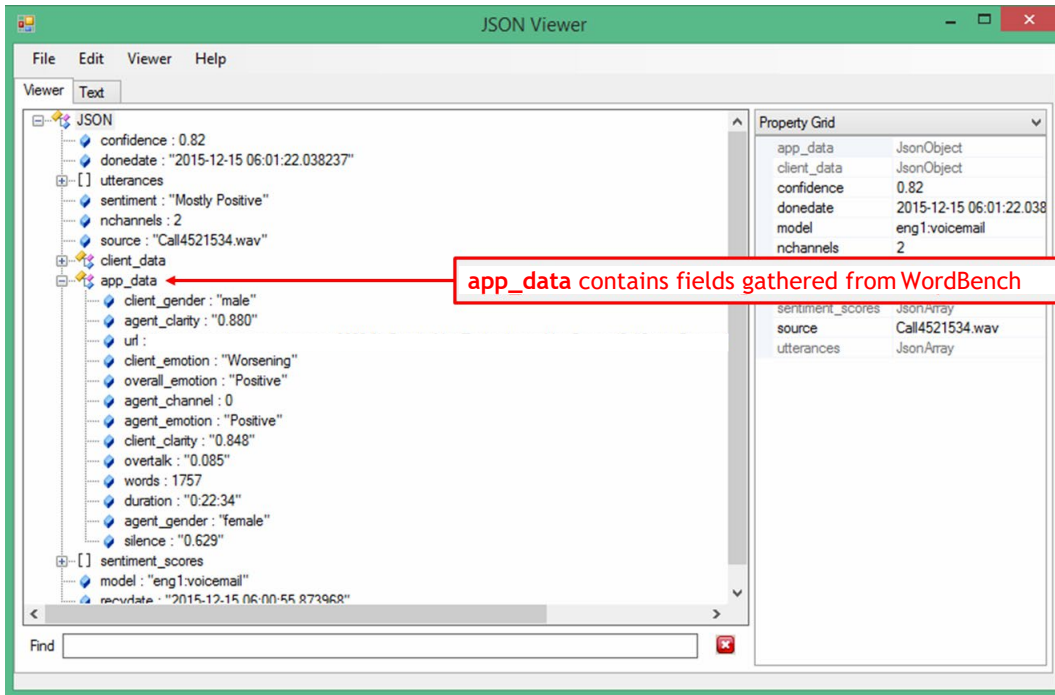

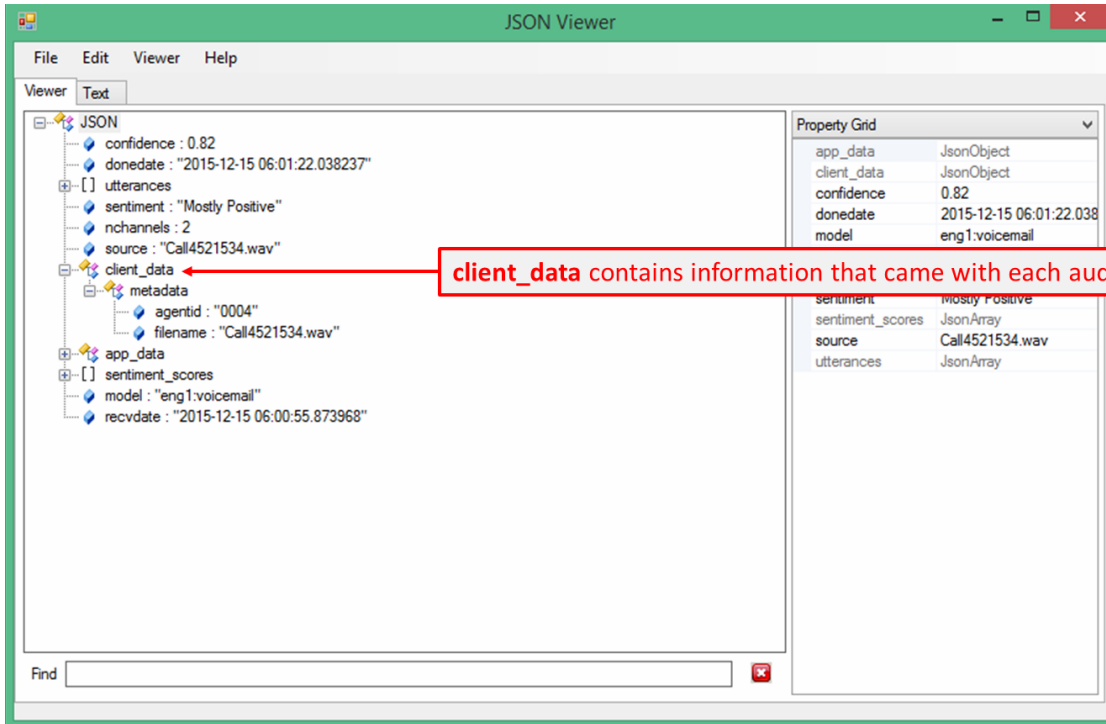

The screenshot shows the JSON Viewer application window. The main pane displays a JSON object with the following structure:

```
JSON
├── confidence : 0.82
├── donedate : "2015-12-15 06:01:22.038237"
├── utterances : []
├── sentiment : "Mostly Positive"
├── nchannels : 2
├── source : "Call4521534.wav"
├── client_data
│   ├── metadata
│   │   ├── agentid : "0004"
│   │   └── filename : "Call4521534.wav"
│   └── app_data
│       ├── sentiment_scores
│       ├── model : "eng1.voicemail"
│       └── recvdate : "2015-12-15 06:00:55.873968"
```

The `client_data` field is highlighted with a red box and an arrow pointing to it. A red text box contains the text: `client_data` contains information that came with each audio file.

The Property Grid on the right shows the following data:

Property	Type
app_data	JsonObject
client_data	JsonObject
confidence	0.82
donedate	2015-12-15 06:01:22.038
model	eng1.voicemail
sentiment	Mostly Positive
sentiment_scores	JsonArray
source	Call4521534.wav
utterances	JsonArray



CALL JOURNEY^{ci}